
DucoLine 80 SR (air pressure-controlled)

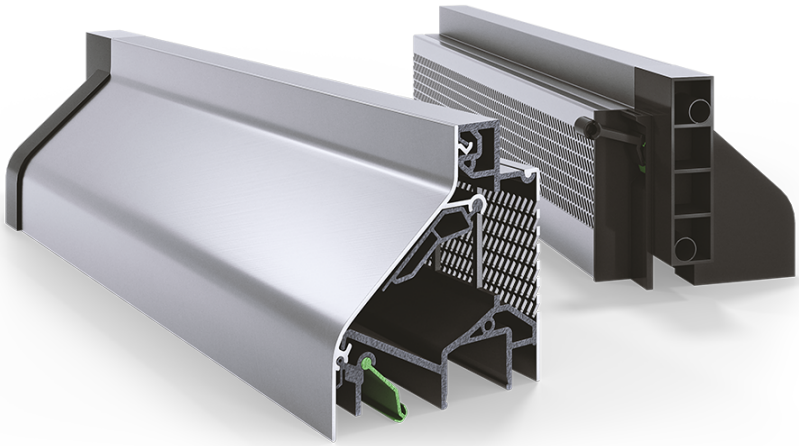

- **To be mounted on the glass or in an independent window field between the crossbars with an adaptive profile**
- Air damper with opening adjustable by means of manual levers
- It has a thermal insulator in the cross-section and a perforated insect screen
- Maximum glazing thickness: 46 mm
- Maximum installation height: 20 m
- Air flow at 10 Pa: up to 98.5 $m^3/h/m$

ACCESSORIES WINDOWS