www.ekookna.com



SMART

INNOVATIVE WINDOW SILL INSTALLATION SYSTEM

The SMART installation system utilizes dedicated guides, ensuring that the window sill is not permanently attached to the facade. It offers effective protection against water and wind and is fully compatible with external insulation systems. This system allows for easier and more convenient window installation.

No permanent facade-sill connection

- Quick and easy sill installation at the end of facade work In case of damage
- the sill can be replaced without interfering with the building facade

No need to measure the sill on the building

- Shortens the investment process
- High tolerance for cutting errors (up to 20 mm)
- The sill length is determined by the window width minus 10-15 mm


2 installation methods

- On a warm sill STROPEX
- On system adapters RAILING

Patent number: P.438455

www.ekookna.com

Dimensions of the sill for the **SMART** system

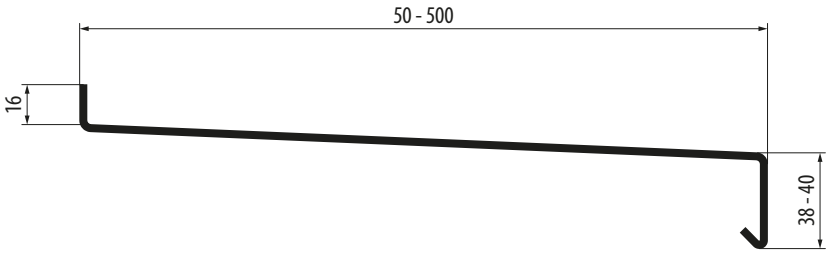

Sill width:	from 50 mm to 500 mm
Sill length:	up to 3000 mm* as standard

*Possibility to order longer sills, max 6400 mm



Adapter height: 12 mm

Components of the **SMART** system	Adapter	Warm sill	
1. ALU Rail 230 mm (2 pcs)	✓	✓	
2. ALU Rail Insert 230 mm (2 pcs)	✓	✓	
3. Rail Adapter (2 pcs)	✓		
4. Window Lock (2 pcs)	✓		
5. Styrofoam Rail Insert (2 pcs)	✓	✓	
6. Under-window Seal 3 m* (1 pc)	✓	✓	
7. Rail Seal 230 mm (2 pcs)	✓	✓	
8. Rail Drainage (4 pcs)	✓	✓	
9. Adapter Angle Bracket (2 pcs)	✓		
10. Adapter Screws (4 pcs)	✓		
11. Rail Screws (4 pcs)	✓	✓	
12. Sill Screws (10 pcs)	✓	✓	
13. Window Lock Screws (2 pcs)	✓		
14. Adapter Angle Bracket Screws (4 pcs)	✓		
15. Installation Instructions	✓	✓	

*Length above 3 m available on request.